



Offering more



**RIPACK**® SERIES 3000





## SAFE

Prevent any burn risks and work in complete safety. With its unique, patented **cold nozzle** system, the gun remains cool during use.


Non-stop rotation of the nozzle possible with bare hands



## PRACTICAL

Large, solid hanger ring.

Easy to attach on RIPACK® gas cylinder trolleys

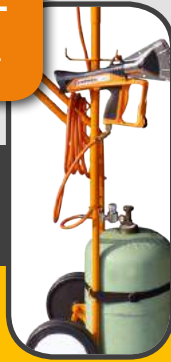

## FAST

Save 15% of your time thanks to its increased power.

By covering an even larger surface area, shrinking operations are much faster and more consistent.

Film 120µ

↑ H

⌚

- 2,00 m = 110 sec
- 1,50 m = 80 sec
- 1,00 m = 50 sec



## SECURIPACK

In the event of hose damage or low gas supply, **two safety mechanisms** in the regulator cut the gas flow and guarantee **the nozzle remains cold**.



The peripheral suction holes allow for a constant air flow under any conditions.



## COMFORTABLE

Dual-material ergonomic handle for improved control. The rotating connection eases hose self-alignment during gun movement.

## ROBUST

Its body is made from **die-cast aluminium** and its nozzle is made from **stainless steel** to insure meeting the conditions of a **reliable and long-lasting product**.





**+ ERGONOMIC**  
The pivoting arm rest provides increased comfort during use with an extension wand and folds away after use for storage.



**Fully rotatable nozzle**

**OPTIONAL EXTENSION**



**+ SMART**

RIPACK® SERIES 3000 is delivered in a footstool carrying case capable of supporting the weight of an operator max. 120 kg (265 lbs). This eases the storage and transport of common accessories.



**MODULAR**

With a range of easily interchangeable extensions the RIPACK® SERIES 3000 can be extended to 2 metres (6.8 feet), so is suitable to all applications from pallet wrapping to buildings containment.

**+ SMART**

The trigger opening enables you to quickly change the igniter. An Allen key is provided for removing the trigger if required.

**+ PRODUCTIVE**  
Say goodbye to production downtime. A reserve igniter is stored in the trigger guard casing and its tool-free changeover can be carried out in less than a minute.

